



Kaydon Bearings marks Real-Slim bearings with an (8) or (9) digit part number for complete identification. Positions 1-8 identify materials, size, type, and precision. Position 9 (optional) identifies non-standard internal fit.

The examples shown are some of the most popular options for Real-Slim bearings. For custom solutions and additional information, please refer to Kaydon Catalog 300.

Positions 1-5 are explained on this page; Positions 6-9 on the other side.

Position	1	2	3	4	5	6	7	8	9
Example	K	G	1	2	0	X	P	0	L
Description	Material	Series	Size	Size	Size	Type	Separator	Precision	Internal Fit


Position 1 – Material

Races/Balls	Seals, Shields
A – AISI 52100 Steel	with One seal—PTFE
B – AISI 52100 Steel	with Two seals—PTFE
D – AISI 52100 Steel	with One shield
E – AISI 52100 Steel	with Two shields
F – AISI 52100 Steel	with One seal—Nitrile rubber LAMI-SEAL®
G – AISI 52100 Steel	with Two seals—Nitrile rubber LAMI-SEAL®
H – AISI 52100 Steel	with One seal—Nitrile rubber
J – AISI 52100 Steel	with Two seals—Nitrile rubber
K – AISI 52100 Steel	with No seals or shields
L – AISI 52100 Steel	with Two seals and ENDURAKOTE® plating
M – M-50 Steel	with No seals or shields
N – AISI 52100 Steel	with No seals and ENDURAKOTE® plating
P – AISI 17-4PH Steel	with Ceramic Balls*
Q – AISI 52100 Steel	with No shields or seals*
S – AISI 440C Stainless Steel	with No seals or shields
T – AISI 440C Stainless Steel	with One seal—PTFE
U – AISI 440C Stainless Steel	with Two seals—PTFE
V – AISI 440C Stainless Steel	with Two shields
W – AISI 440C Stainless Steel	with Two seals—Nitrile rubber
X – AISI 52100 Steel	with Ceramic Balls
Y – AISI 440C Stainless Steel	with Ceramic Balls*
Z – Other	


*See Section 6 of Kaydon Catalog 300.

Position 2 – Series Standard Cross Section

Open Bearings

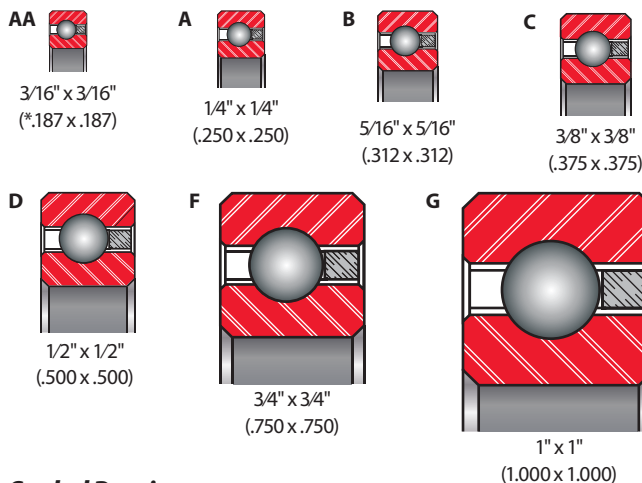

Sealed Bearings

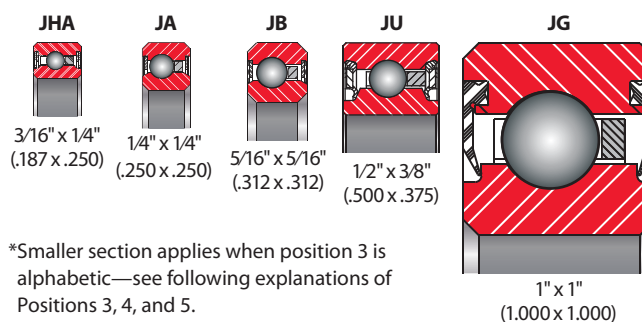

*Smaller section applies when position 3 is alphabetic—see following explanations of Positions 3, 4, and 5.

Position 3, 4 and 5 – Size (Bearing Bore)

Numeric Characters - Nominal bearing bore in inches multiplied by ten

Alphabetic Characters -

"A" in Position 3 in combination with "A" in Position 2 denotes .187 x .187 Series

"A" in Position 3 in combination with "H" in Position 2 denotes .187 x .250 Series








Examples - 040 = 4.0" Bore, 120 = 12.0" Bore, 400 = 40.0" Bore

"10" following "AA" in Positions 2 & 3 = .187 x .187 Series with 1.0" Bore

"15" following "HA" in Positions 2 & 3 = .187 x .250 Series with 1.5" Bore

Position	1	2	3	4	5	6	7	8	9
Example	K	G	1	2	0	X	P	0	L
Description	Material	Series	Size	Size	Size	Type	Separator	Precision	Internal Fit

Position 6 – Bearing Type

- A**  Angular contact single bearing (not ground for universal duplexing)
- B**  Angular contact pair—duplexed back to back
- C**  Radial contact
- F**  Angular contact pair—duplexed face to face
- T**  Angular contact pair—duplexed tandem
- U**  Angular contact single bearing—ground for universal duplexing
- X**  Four-point contact
- Z** Other

Position 7 – Separator - Bearing Type noted



- C** Non-metallic composite, segmental, “snap-over” type - C, X
- D** Phenolic laminate, one-piece ring, “snap-over” type - C, X
- E** Brass, segmental “snap-over” type - C, X
- L** One-piece molded ring with “snap-over” pockets - C, X
- N** Molded strip with “snap-over” pockets - C, X
- P** Standard one-piece formed ring with “snap-over” pockets - C, X
- T** Stainless steel, formed ring “snap-over” type - C, X
- V** Brass, formed ring, “snap-over” pockets - C, X
- X** PEEK, one-piece molded ring with “snap-over” pockets - C, X



- G** One-piece molded ring with circular pockets - A
- H** One-piece machined ring with circular pockets - A
- J** Molded strip with circular pockets - A
- K** Phenolic laminate, riveted two-piece ring type - A, C, X
- Q** PEEK, one-piece molded ring with circular pockets - A
- R** Standard one-piece formed ring with circular pockets - A
- U** Stainless steel, formed ring circular pockets type - A
- Y** Brass, formed ring, circular pockets type - A



- M** Formed wire strip or segmental cage, “snap-over” pockets - A, C, X
- W** Formed wire strip or segmental cage, “snap-over” pockets - C, X



- F** Full complement bearing - A, C, X
- S** Helical coil spring - C, X
- Z** Other (toroid ball spacers, spacer slugs, spacer ball or others available) - A, C, X

Position 8 – Precision

(ABEC Specifications are per ABMA Standard 26.2)

- 0** KAYDON Precision Class 1 per ABEC 1F
- 1** KAYDON Precision Class 1 with Class 4 Runouts
- 2** KAYDON Precision Class 1 with Class 6 Runouts
- 3** KAYDON Precision Class 3 per ABEC 3F
- 4** KAYDON Precision Class 4 per ABEC 5F
- 6** KAYDON Precision Class 6 per ABEC 7F
- 8** Other

Position 9 – Bearing Internal Fit

- | | |
|-----------------------------------|---|
| A .0000 to .0005 Clearance | K .0000 to .0005 Preload |
| B .0000 to .0010 Clearance | L .0000 to .0010 Preload |
| C .0005 to .0010 Clearance | M .0005 to .0010 Preload |
| D .0005 to .0015 Clearance | N .0005 to .0015 Preload |
| E .0010 to .0020 Clearance | P .0010 to .0020 Preload |
| F .0015 to .0025 Clearance | Q .0010 to .0015 Preload |
| G .0020 to .0030 Clearance | R .0015 to .0025 Preload |
| H .0030 to .0040 Clearance | S .0020 to .0030 Preload |
| I .0040 to .0050 Clearance | Z Other clearance or preload not specified above |
| J .0050 to .0060 Clearance | |

Blank Standard default clearance (see Precision Tolerances tables in Section 3 of Catalog 300 for default clearance by bearing size)

- Type X or C = Diametral Preload or Clearance
- Duplexed Type A = Axial Preload or Clearance

Note: Above internal bearing fits apply to unmounted bearings only. Mounting fits can greatly affect final internal bearing fit.



Kaydon Bearings Division
2860 McCracken Street
Muskegon, Michigan 49441 U.S.A.

231.755.3741 tel
800.514.3066 free
231.759.4102 fax

bearings@kaydon.com
www.kaydonbearings.com